

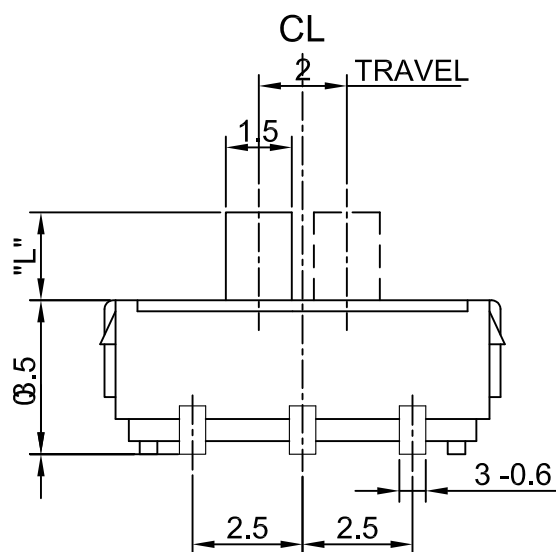


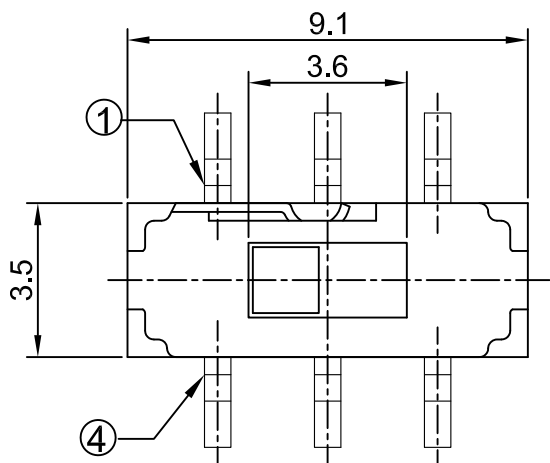

SMD REFLOW PATTERN
(TOLERANCE : ± 0.05 / SCALE : N/S)

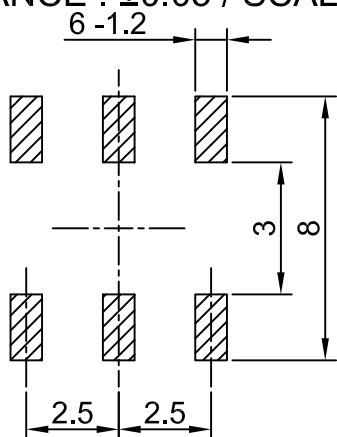

MODEL

L (mm)



CTS-2235S

2.0

CTS-2235SA

4.0

CIRCUIT DIAGRAM

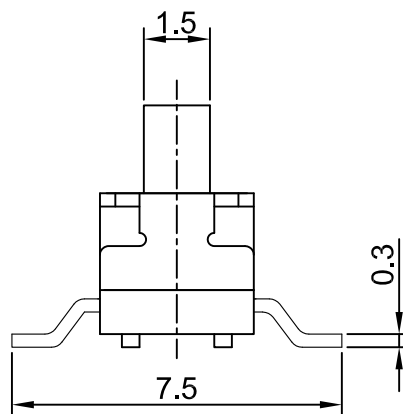

SPECIFICATIONS

1. RATING : DC 6V / 0.3A
2. CIRCUIT : 2C-2P
3. TIMING : NON-SHOTING
4. STROKE : 2mm ± 0.3 mm
5. OPERATING FORCE : 200 ± 100 gf
6. CONTACT RESISTANCE : 70m Ω MAX.
7. OPERATING LIFE : 10000 CYCLES MIN.
8. NON SPECIFIED DIMENSIONS
TOLERANCE : ± 0.2

NO	PARTS NAME	MATERIAL	SPECIFICATION	Q'TY	FINISH	REFERENCE
		GENERAL TORANCE (UNLESS SPECIFIED)	SCALE 6 / 1	UNIT METRIC	TITLE	CTS-2235S
			THIRD ANGLE PROJECTION	SIZE A4	DOCUMENT NUMBER	R-S2235S-AD-01A-A
		DRAWN BY	CHECKED BY	APPROVED BY	CREATIVE ELECTRONICS CO.,LTD. www.creative-elec.com	
REV	DESCRIPTION	DATE	C.KIM		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIET TO CREATIVE ELECTRONICS CO.,LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	